


## Stainless steel belt conveyor

Sturdy ■ Reliable ■ Easy to clean

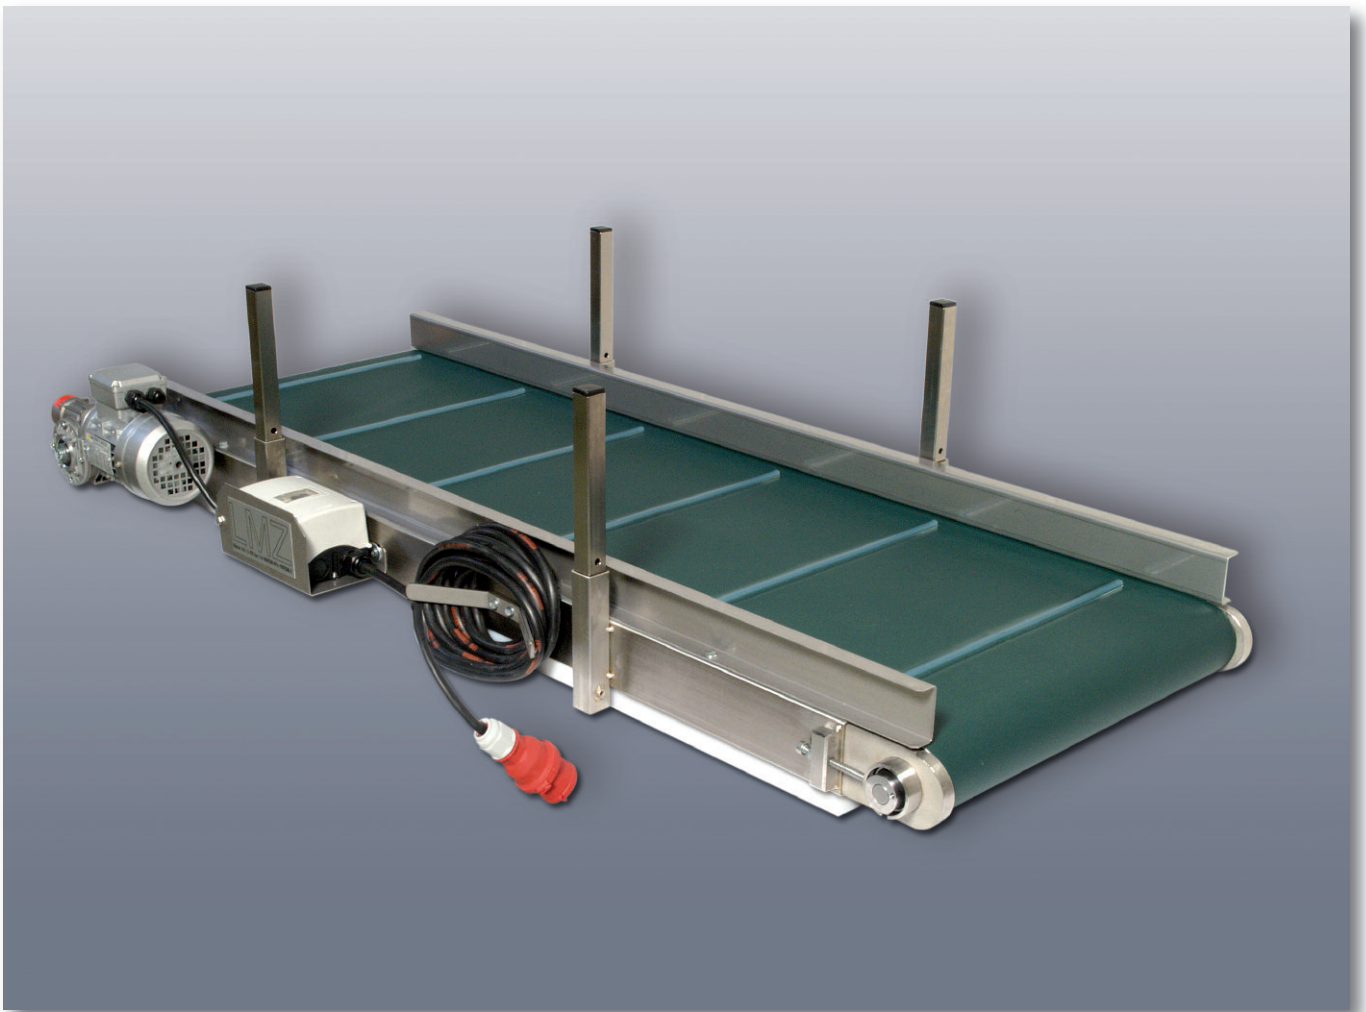


### Characteristics:

- ▶ Stainless steel (VA) belt conveyor with plastic hinge plate belt and plastic slats, alternatively with conveyor belt.
- ▶ Sidewalls made of stainless steel
- ▶ Also ideal for small parts
- ▶ Solid and sturdy stainless steel construction
- ▶ Mobile, alternatively as tripod-version

### Options:

- ▶ Distributor chute
- ▶ Transparent cover
- ▶ Adjustable conveyor belt speed
- ▶ Sequential control system
- ▶ Reversible operation possible
- ▶ Centered belt-guideway



Components for your automation.

# The component System



## Choose the configuration you require:

Height of feeding section  $L_{Auf}$ : \_\_\_\_\_ mm  
 Height of discharging section  $L_{Ab}$ : \_\_\_\_\_ mm  
 Length of transport  $L_A$ : \_\_\_\_\_ mm  
 Width of belt: \_\_\_\_\_ mm  
 Motor:  Hollow shaft  Drum  
 Height of slats:  20 mm  30 mm  \_\_\_\_\_ mm  
 Belt design: \_\_\_\_\_  
 Conveyor belt speed:  4 m/min.  9 m/min.  12 m/min.  
 Directional control:  Yes  No  Variable  
 Height of directional control: \_\_\_\_\_ mm  
 Options:  Side railing  Controllable  Sequential control system

**Standard horizontal belt conveyor**

**Configuration:**  
 400 V, 3 Ph., 50 Hz • 5 m connecting cable  
 CEE plug 16 A

## A+L-belt conveyors in different designs:

- |                                       |   |
|---------------------------------------|---|
| <p><b>Z-shaped belt conveyors</b></p> | <p><b>Horizontal belt conveyors</b></p>       |
| <p><b>L-shaped belt conveyors</b></p> | <p><b>Belt conveyors with storage bin</b></p> |

Firm stamp

Subject to technical modifications. Availability and errors excepted · 236/10.10/GB